
















# NARTAPE TAPES

INFORMATIVE  
DATA SHEET



	 backing thickness µm	 total thickness µm	 adhesion N/cm	 breaking load N/cm	 elongation at break %	 available colours	 directly printable	 silent unwinding	 heavy weight packaging	 medium weight packaging
NARTAPE 140	32	51	> 1,5 (BI) > 1,8 (AV TR)	> 45	> 48		•	•		•
NARTAPE 165	37	56	> 1,8	> 50	> 48		•	•		•
NARTAPE 190	60	81	> 1,8	> 68	> 80		•	•	•	

● brown ○ white ⊘ transparent ● red ● orange ● black ● yellow ● green ● light blue ● blue ● fluo orange



NAR S.P.A.  
Legnaro (PADOVA) ITALY  
[www.nar-spa.com](http://www.nar-spa.com)

It is good practice to use the product within 12 months from purchase date (6 months if jumbo roll). The rolls must be kept in their original packing. Keep the product out of the light and protect from direct heat sources. The tape must be kept in a dry place, at humidity level below 65%, preferably at a temperature between 15° C and 25° C. If the storage temperature is different, restore the tape back to above level before using it. The values in the informative data sheets are the average results of tests made on our standard production and are not legally binding. The aesthetic and technical features may be subject to some changes caused by ageing, even though the quality level of the product is maintained. Nar shall not be liable for direct damages or for any consequence arising from the misuse of the product. We suggest the verification of the product suitability to the specific condition of use. Additional indications are available in the last edition of the booklet "Recommendation regarding choice, storing and use of pressure sensitive tapes" published by Federazione Gomma Plastica.




[www.nar-spa.com/technical-notes.html](http://www.nar-spa.com/technical-notes.html)



# NARTAPE 140

INFORMATIVE  
DATA SHEET

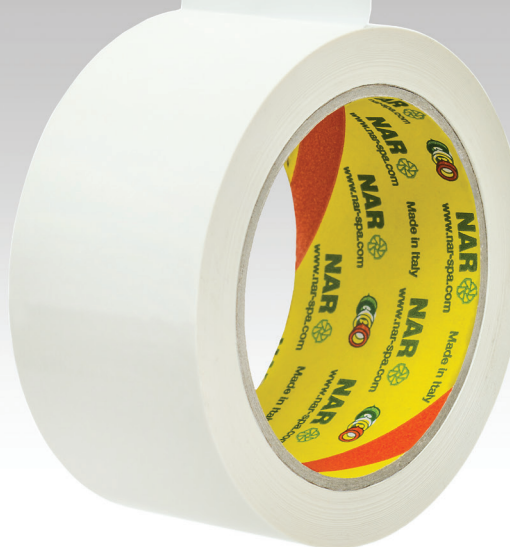

MEDIUM WEIGHT PACKAGING



HAND DISPENSER



WATER RESISTANT

## NARTAPE

### COMPOSITION

BACKING: polyvinylchloride (PVC) film  
ADHESIVE: natural rubber / hydrocarbonic resins / solvent  
CORE: recycled paper and paperboard.

### SUITABLE FOR

Hand dispensers; sealing of recycled cardboard boxes;  
flexographic machine print

### AVAILABLE COLOURS

Brown - white - transparent

The excellent mechanical characteristics of resistance, plasticity and adhesion, combined with silent unwinding, make this tape suitable for all packaging applications and traditional uses.



BACKING THICKNESS  
32  $\mu$ m



DIRECTLY  
PRINTABLE




SILENT  
UNWINDING



# NARTAPE 165

INFORMATIVE  
DATA SHEET

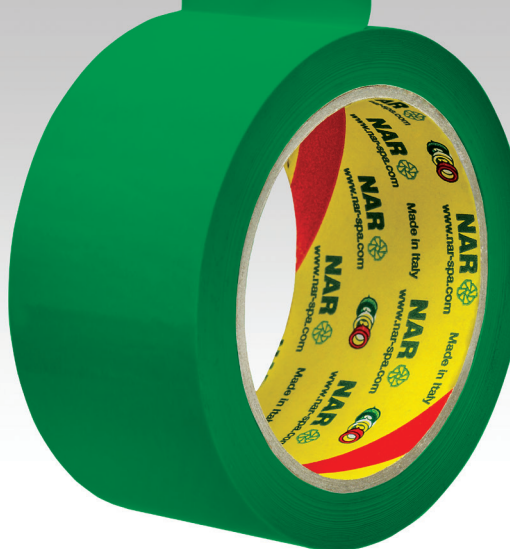

MEDIUM WEIGHT PACKAGING



HAND DISPENSER



WATER RESISTANT

## NARTAPE

### COMPOSITION

BACKING: polyvinylchloride (PVC) film  
ADHESIVE: natural rubber / hydrocarbonic resins / solvent  
CORE: recycled paper and paperboard

### SUITABLE FOR

Hand dispensers; sealing of recycled; cardboard boxes;  
flexographic machine print

### AVAILABLE COLOURS

Red - orange - black - white - yellow - green - light blue -  
dark blue - fluo orange

The excellent mechanical characteristics of resistance, plasticity and adhesion, combined with silent unwinding, make this tape suitable for all packaging applications and traditional uses.



BACKING THICKNESS  
37  $\mu$ m



DIRECTLY  
PRINTABLE



SILENT  
UNWINDING



# NARTAPE 190

INFORMATIVE  
DATA SHEET



HEAVY WEIGHT PACKAGING



HAND DISPENSER



WATER RESISTANT

## NARTAPE

### COMPOSITION

BACKING: polyvinylchloride (PVC) film  
ADHESIVE: natural rubber / hydrocarbonic resins / solvent  
CORE: recycled paper and paperboard

### SUITABLE FOR

Hand dispensers; sealing of recycled cardboard boxes;  
flexographic machine print

### AVAILABLE COLOURS

Brown - transparent

The excellent mechanical characteristics of resistance, plasticity and adhesion, combined with silent unwinding, make this tape suitable for all packaging applications and traditional uses.



BACKING THICKNESS  
60 µm



DIRECTLY  
PRINTABLE



SILENT  
UNWINDING