

INFORMATIVE DATA SHEET



	+		\(\)	jijk.	<i>></i>			•	9	*
	backing thickness µm	total thickness µm	adhesion N/cm	breaking Ioad N/cm	elongation at break %	available colours	medium weight packaging	light weight packaging	automatic sealing machine	suitable for low temperatures packaging
POLIPRINT 240	28	47	> 2,0	> 39	> 116	• 0 0		•	•	•
POLINARPRINT 260	32	51	> 2,0	> 45	> 116	• 0 0	•		•	•
POLINARPRINT 265	32	51	> 2,0	> 45	> 116	• • • •	•		•	•
NARPRINT 140	32	51	> 1,5 (BI) > 1,8 (AV TR)	> 45	> 48	• 0 0	•			
NARPRINT 165	37	56	> 1,8	> 50	> 48		•			
NARPOUCH 240	28	47	n.r.	> 39	> 116	Ø				
NARPOUCH 260	32	51	n.r.	> 45	> 116	Ø				
RENEWA® TAPE 465	58	135	> 2,2	> 31	> 7	• 0		•	•	

brown

 \bigcirc white

transparent

red

orange

black

yellow

green

light blue

blue

lue efluo orange



NAR S.P.A. Legnaro (PADOVA) ITALY www.nar-spa.com It is good practice to use the product within 12 months from purchase date (6 months if jumbo roll). The rolls must be kept in their original packing. Keep the product out of the light and protect from direct heat sources. The tape must be kept in a dry place, at humidity level below 65%, preferably at a temperature between 15° C and 25° C. If the storage temperature is different, restore the tape back to above level before using it. The values in the informative data sheets are the average results of tests made on our standard production and are not legally binding. The aesthetic and technical features may be subject to some changes caused by ageing, even though the quality level of the product is maintained. Nar shall not be liable for direct damages or for any consequence arising from the misuse of the product. We suggest the verification of the product suitability to the specific condition of use. Additional indications are available in the last edition of the booklet "Recommendation regarding choice, storing and use of pressure sensitive tapes" published by Federazione Gomma Plastica.





COMPOSITION

BACKING: printed or pre-printed biaxially oriented polypropylene film

ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Hand dispensers and automatic sealing machines; sealing of recycled cardboard boxes

AVAILABLE COLOURS

Brown - white - transparent

The guick adhesion at high and low temperatures on all cardboard, the resistance and brilliance typical of polypropylene films, make it ideal for all applications in the packaging sector.



BACKING THICKNESS 28 µm



BREAKING LOAD > 39 N/cm



PRINTED TAPE



LIGHT WEIGHT PACKAGING



AUTOMATIC SEALING MACHINE



SUITABLE FOR LOW TEMPERATURES PACKAGING













COMPOSITION

BACKING: printed or pre-printed biaxially oriented polypropylene film

ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Hand dispensers and automatic sealing machines; sealing of recycled cardboard boxes

AVAILABLE COLOURS

Brown - white - transparent

The quick adhesion at high and low temperatures on all cardboard, the resistance and brilliance typical of polypropylene films, make it ideal for all applications in the packaging sector.



BACKING THICKNESS **32** µm



BREAKING LOAD > 45 N/cm



PRINTED TAPE



MEDIUM WEIGHT PACKAGING



AUTOMATIC SEALING MACHINE



SUITABLE FOR LOW TEMPERATURES PACKAGING

















MEDIUM WEIGHT PACKAGING



AUTOMATIC SEALING MACHINE



SUITABLE FOR LOW TEMPERATURES PACKAGING

PRINTED TAPES

COMPOSITION

BACKING: printed and pre-printed biaxially oriented polypropylene film

ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Hand dispensers and automatic sealing machines; sealing of recycled cardboard boxes

AVAILABLE COLOURS

Red - orange - black - yellow - dark blue - green - light blue

The quick adhesion at high and low temperatures on all cardboard, the resistance and brilliance typical of polypropylene films, make it ideal for all applications in the packaging sector.



BACKING THICKNESS **32 μm**



ADESIVITÀ > 2.0 N/cm



PRINTED TAPE













COMPOSITION

BACKING: printed or pre-printed polyvinylchloride (PVC) film ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Hand dispensers; sealing of recycled cardboard boxes; flexographic machine print

AVAILABLE COLOURS

Brown - white - transparent

The excellent mechanical characteristics of resistance, plasticity and adhesion, combined with silent unwinding, make this tape suitable for all packaging applications and traditional uses.



SPESSORE SUPPORTO 32 µm



PRINTED TAPE



SILENT UNWINDING



HAND DISPENSER



WATER RESISTANT












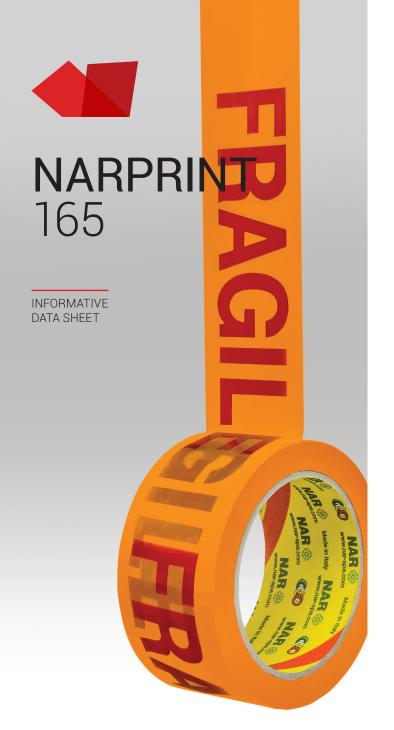

COMPOSITION

BACKING: printed polyvinylchloride (PVC) film ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Hand dispensers; sealing of recycled; cardboard boxes.

AVAILABLE COLOURS

Red - orange - black - white - yellow - green - light blue - dark blue - fluo orange

The excellent mechanical characteristics of resistance, plasticity and adhesion, combined with silent unwinding, make this tape suitable for all packaging applications and traditional uses.



BACKING THICKNESS $37 \ \mu m$



PRINTED TAPE



SILENT UNWINDING





HAND DISPENSER



WATER RESISTANT













COMPOSITION

BACKING: printed biaxially oriented polypropylene film ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Documents protection on parcels during shipments

AVAILABLE COLOURS

Transparency

This tape is suitable for the documents protection of a wide range of shipping parcels. The non tack adhesive areas avoid any damaging of the document enclosed. Hand or table dispenser application on the package. The printing and the non adhesive areas are customizable.



BACKING THICKNESS **28 µm**



PRINTED TAPE



BREAKING LOAD > 39 N/cm















COMPOSITION

BACKING: printed biaxially oriented polypropylene film ADHESIVE: natural rubber / hydrocarbonic resins / solvent CORE: recycled paper and paperboard

SUITABLE FOR

Documents protection on parcels during shipments

AVAILABLE COLOURS

Transparency

This tape is suitable for the documents protection of a wide range of shipping parcels. The non tack adhesive areas avoid any damaging of the document enclosed. Hand or table dispenser application on the package. The printing and the non adhesive areas are customizable.



BACKING THICKNESS **32** µm



PRINTED TAPE



BREAKING LOAD > 45 N/cm














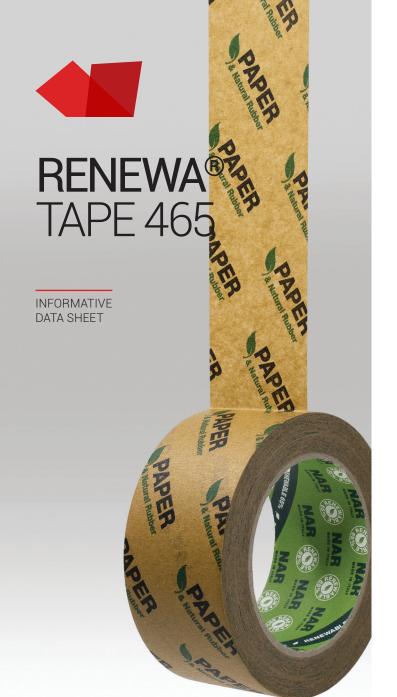

COMPOSITION

BACKING: lightly crepe paper

ADHESIVE: natural rubber / hydrocarbonic resins / solvent

CORE: recycled paper and paperboard

SUITABLE FOR

Light weight packaging, hand dispensers and automatic sealing machines

AVAILABLE COLOURS

Brown - white

Excellent grip after application. Particularly suited for light packaging by hand dispensers and automatic sealing machines applications.

In line with NAR's dedication to environmental sustainability, 65% of this product is made with materials from renewable resources. The tape is printed with an exclusive NAR technology, which guarantees an excellent definition together with the affirmed performances of the natural rubber adhesive.



BACKING WEIGHT 58 g/m²



PRINTED TAPE



MATERIALS FROM RENEWABLE RESOURCES



LIGHT WEIGHT PACKAGING



AUTOMATIC SEALING MACHINE



FSC® CERTIFIED VERSION AVAILABLE ON REQUEST









